

Suitable Light for General Lighting applications

LED RECESSED CEILING LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 16 models based on their specific need with lumen package from 460lm to 2550lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

FEATURES

- High CRI>95.
- Long life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.

illus
illumination

BEYOND LIGHT..
TO THE LAST DETAILS!

AREAS OF APPLICATION

Hospitality

Public indoor

Shopping Center

Commercial

Workplace

Educational center




TECHNICAL OPERATING & ELECTRICAL DATA

Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	>95
Beam Angle	24°
Life Span	30,000h
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	45°C
Switching Cycle ON/OFF	100,000
Body Material	Aluminum


SPECIFICATIONS

Code No.	Model No.	Power	CCT	Lumen	Efficacy	Body Color
LI613802	ILS6WRSL930WW01	6.5W	3000K	460lm	70.77lm/w	White + Black
LI613803	ILS6WRSL930WW02	6.5W	3000K	460lm	70.77lm/w	Black
LI613804	ILS6WRSL940NW01	6.5W	4000K	470lm	72.31lm/w	White + Black
LI613805	ILS6WRSL940NW02	6.5W	4000K	470lm	72.31lm/w	Black
LI613808	ILS12WRSL930WW01	12W	3000K	900lm	75lmw	White + Black
LI613809	ILS12WRSL930WW02	12W	3000K	900lm	75lm/w	Black
LI613810	ILS12WRSL940NW01	12W	4000K	920lm	76.67lm/w	White + Black
LI613811	ILS12WRSL940NW02	12W	4000K	920lm	76.67lm/w	Black
LI613814	ILS24WRSL930WW01	24W	3000K	1680lm	70lm/w	White + Black
LI613815	ILS24WRSL930WW02	24W	3000K	1680lm	70lm/w	Black
LI613816	ILS24WRSL940NW01	24W	4000K	1720lm	71.67lm/w	White + Black
LI613817	ILS24WRSL940NW02	24W	4000K	1720lm	71.67lm/w	Black
LI613820	ILS35WRSL930WW01	35W	3000K	2500lm	71.43lm/w	White + Black
LI613821	ILS35WRSL930WW02	35W	3000K	2500lm	71.43lm/w	Black
LI613822	ILS35WRSL940NW01	35W	4000K	2550lm	72.86lm/w	White + Black
LI613823	ILS35WRSL940NW02	35W	4000K	2550lm	72.86lm/w	Black


DIMENSIONS

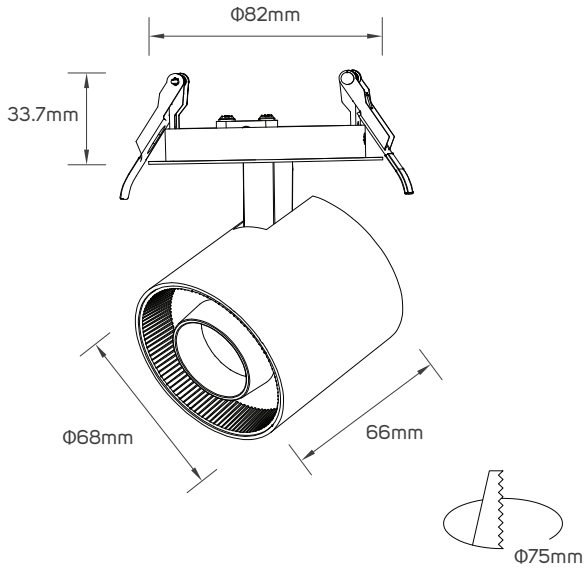


LI613802 - LI613803 - LI613804 - LI613805

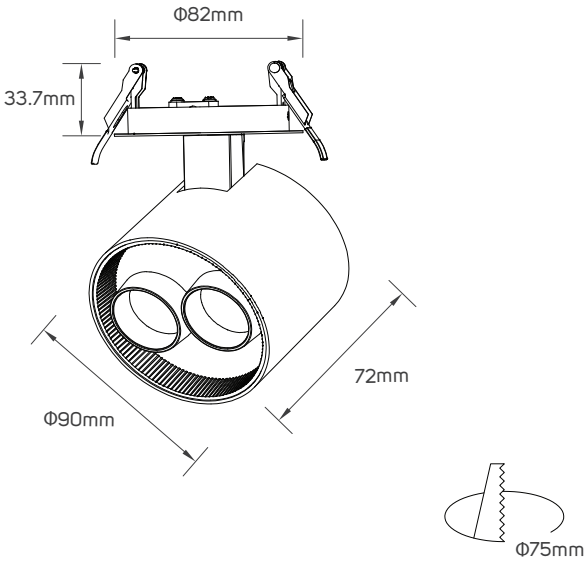

LI613808 - LI613809 - LI613810 - LI613811

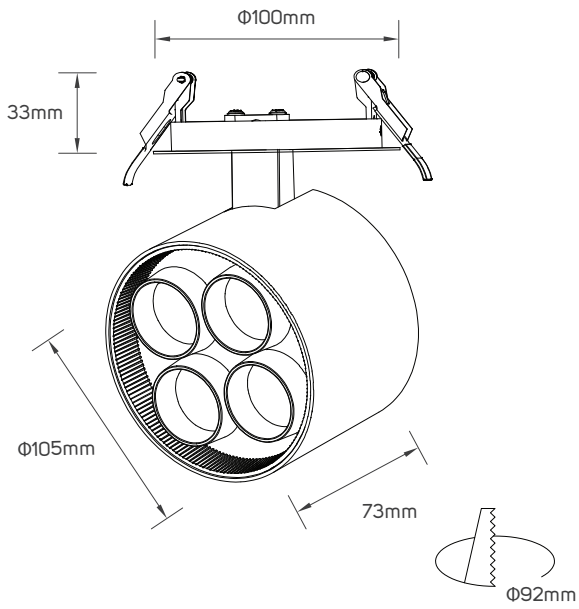

LI613814 - LI613815 - LI613816 - LI613817

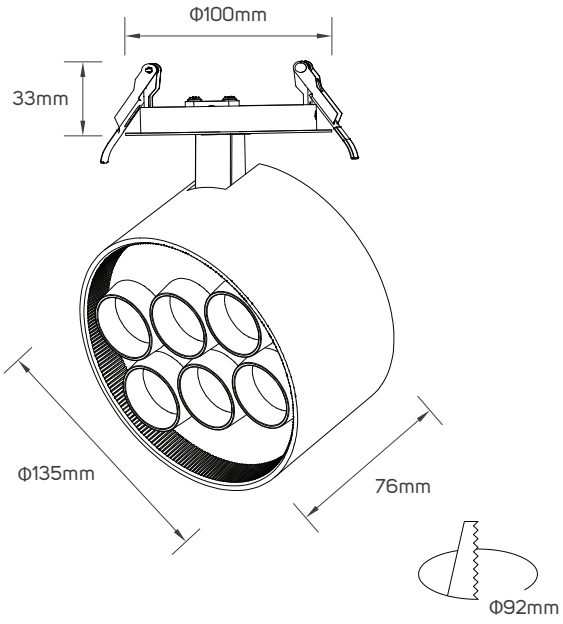

LI613820 - LI61382 - LI613822 - LI613823

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**

illus
illumination

Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456 www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in produ literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

09092021V1