



The suitable light for general lighting applications

LED RECESSED CEILING LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 30 models based on their specific need with lumen package from 610lm to 4500lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

FEATURES

- High CRI>90.
- Efficacy up to 82lm/w.
- Long lifespan 50,000H.
- Operating voltage AC220-240V.
- Non-Dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center



TECHNICAL OPERATING & ELECTRICAL DATA

IP Ratingss	IP65
Body Material	Aluminum
Lumen	from 610 to 4500lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed on Ceiling
Dimming	Non-Dimmable
Lamp Type	Direct
Fixed or Adjustable	Fixed
Lifespan	50000H
Unified Glare Rating	<19

SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	P.F	CCT	Beam Angle	Cutting Size
613077	ILS9DLO930WW01	white	9W	610lm	67.78lm/w	0.57	3000K	24°	Ø70mm
613078	ILS9DLO940NW01	white	9W	640lm	71.11lm/w	0.57	4000K	24°	Ø70mm
613079	ILS9DLO950DL01	white	9W	660lm	73.33lm/w	0.57	5000K	24°	Ø70mm
613080	ILS9DLO930WW02	black	9W	610lm	67.78lm/w	0.57	3000K	24°	Ø70mm
613081	ILS9DLO940NW02	black	9W	640lm	71.11lm/w	0.57	4000K	24°	Ø70mm
613082	ILS9DLO950DL02	black	9W	660lm	73.33lm/w	0.57	5000K	24°	Ø70mm
613083	ILS15DLO930WW01	white	15W	1120lm	74.67lm/w	0.51	3000K	24°	Ø100mm
613084	ILS15DLO940NW01	white	15W	1130lm	75.33lm/w	0.51	4000K	24°	Ø100mm
613085	ILS15DLO950DL01	white	15W	1140lm	76lm/w	0.51	5000K	24°	Ø100mm
613086	ILS15DLO930WW02	black	15W	1120lm	74.67lm/w	0.51	3000K	24°	Ø100mm
613087	ILS15DLO940NW02	black	15W	1130lm	75.33lm/w	0.51	4000K	24°	Ø100mm
613088	ILS15DLO950DL02	black	15W	1140lm	76lm/w	0.51	5000K	24°	Ø100mm
613089	ILS20DLO930WW02	white	20W	1450lm	72.50lm/w	0.51	3000K	36°	Ø140mm
613090	ILS20DLO940NW02	white	20W	1510lm	75.50lm/w	0.51	4000K	36°	Ø140mm
613091	ILS20DLO950DL02	white	20W	1550lm	77.50lm/w	0.51	5000K	36°	Ø140mm
613092	ILS20DLO930WW01	black	20W	1450lm	72.50lm/w	0.51	3000K	36°	Ø140mm
613093	ILS20DLO940NW01	black	20W	1510lm	75.50lm/w	0.51	4000K	36°	Ø140mm
613094	ILS20DLO950DL01	black	20W	1550lm	77.50lm/w	0.51	5000K	36°	Ø140mm

SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	P.F	CCT	Beam Angle	Cutting Size
613095	ILS37DLO930WW01	White	37W	2700lm	72.97lm/w	0.98	3000K	36°	Ø200mm
613096	ILS37DLO940NW01	White	37W	2900lm	78.38lm/w	0.98	4000K	36°	Ø200mm
613097	ILS37DLO950DLO1	White	37W	3050lm	82.43lm/w	0.98	5000K	36°	Ø200mm
613098	ILS37DLO930WW02	Black	37W	2700lm	72.97lm/w	0.98	3000K	36°	Ø200mm
613099	ILS37DLO940NW02	Black	37W	2900lm	78.39lm/w	0.98	4000K	36°	Ø200mm
613100	ILS37DLO950DLO2	Black	37W	3050lm	82.43lm/w	0.98	5000K	36°	Ø200mm
613101	ILS55DLO930WW01	White	55W	4000lm	72.73lm/w	0.94	3000K	36°	Ø200mm
613102	ILS55DLO940NW01	White	55W	4300lm	78.18lm/w	0.94	4000K	36°	Ø200mm
613103	ILS55DLO950DLO1	White	55W	4500lm	81.82lm/w	0.94	5000K	36°	Ø200mm
613104	ILS55DLO930WW02	Black	55W	4000lm	72.73lm/w	0.94	3000K	36°	Ø200mm
613105	ILS55DLO940NW02	Black	55W	4300lm	78.18lm/w	0.94	4000K	36°	Ø200mm
613106	ILS55DLO950DLO2	Black	55W	4500lm	81.82lm/w	0.94	5000K	36°	Ø200mm

ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Mounting Type
613112	ILS70REFDLOW01	Shiny White	Plastic	Reflector Fitting
613113	ILS70REFDLOB01	Shiny Black	Plastic	Reflector Fitting
613114	ILS70REFDLOGB01	Gun Black	Plastic	Reflector Fitting
613115	ILS100REFDLOW01	Shiny White	Plastic	Reflector Fitting
613116	ILS100REFDLOB01	Shiny Black	Plastic	Reflector Fitting
613117	ILS100REFDLOGB01	Gun Black	Plastic	Reflector Fitting
613118	ILS140REFDLOW01	Shiny wWhite	Plastic	Reflector Fitting
613119	ILS140REFDLOB01	Shiny Black	Plastic	Reflector Fitting
613120	ILS140REFDLOGB01	Gun Black	Plastic	Reflector Fitting
613121	ILS200REFDLOW01	Shiny White	Plastic	Reflector Fitting
613122	ILS200REFDLOB01	Shiny Black	Plastic	Reflector Fitting
613123	ILS200REFDLOGB01	Gun Black	Plastic	Reflector Fitting
613124	ILS70SMBDLOW01	White	Plastic	Surface Mounted
613125	ILS70SMBDLOB01	Black	Plastic	Surface Mounted
613126	ILS100SMBDLOW01	White	Plastic	Surface Mounted
613127	ILS100SMBDLOB01	Black	Plastic	Surface Mounted
613128	ILS140SMBDLOW01	White	Plastic	Surface Mounted
613129	ILS140SMBDLOB01	Black	Plastic	Surface Mounted
613130	ILS200SMBDLOW01	White	Plastic	Surface Mounted
613131	ILS200SMBDLOB01	Black	Plastic	Surface Mounted
614002	ILS70REFDLOW01	White	Plastic	Reflector fitting
614003	ILS100REFDLOW01	White	Plastic	Reflector fitting
614004	ILS140REFDLOW01	White	Plastic	Reflector fitting
614005	ILS200REFDLOW01	White	Plastic	Reflector fitting

ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Power	Voltage
613107	ILS8WACDLDO1	White	Plastic	8W	AC220-240V
613108	ILS15WACDLDO1	White	Plastic	15W	AC220-240V
613109	ILS20WACDLDO1	White	Plastic	20W	AC220-240V
613110	ILS40WACDLDO1	White	Plastic	40W	AC220-240V
613111	ILS60WACDLDO1	White	Plastic	60W	AC220-240V



ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Beam Angle
614219	ILS15DLEN70MMDLO1	Transparent	PC	15°
612420	ILS36DLEN70MMDLO1	Transparent	PC	36°
614319	ILS60DLEN70MMDLO1	Transparent	PC	60°
614221	ILS15DLEN100MMDLO1	Transparent	PC	15°
614222	ILS36DLEN100MMDLO1	Transparent	PC	36°
614320	ILS60DLEN100MMDLO1	Transparent	PC	60°
614223	ILS60DLEN140MMDLO1	Transparent	PC	60°
614224	ILS60DLEN200MMDLO1	Transparent	PC	60°



ACCESSORIES

Code No.	Body Color	Body Material	IP Rating	Max. Wattage
615978	White	PC	IP65	15W
615980	White	PC	IP65	36W
615981	White	PC	IP65	60W
615983	White	PC	IP65	10W
615984	White	PC	IP65	24W



DIMENSIONS





613077 - 613078 - 613079 - 613080 - 613081 - 613082





613083 - 613084 - 613085 - 613086 - 613087 - 613088



613089 - 613090 - 613091 - 613092 - 613093 - 613094




613095 - 613096 - 613097 - 613098 - 613099 - 613100




613101 - 613102 - 613103 - 613104 - 613105 - 613106


ACCESSORIES DIMENSIONS




613112 - 613113 - 613114 - Reflector




613115 - 613116 - 613117 - Reflector

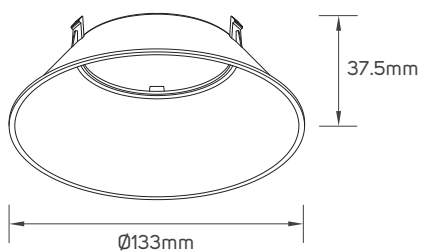


613118 - 613119 - 613120 - Reflector

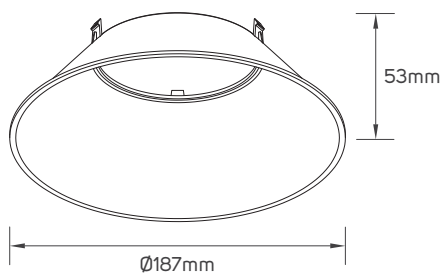


613121 - 613122 - 613123 - Reflector




613124 - 613125 - Surface Mounted Kit



613126 - 613127 - Surface Mounted Kit




613128 - 613129 - Surface Mounted Kit

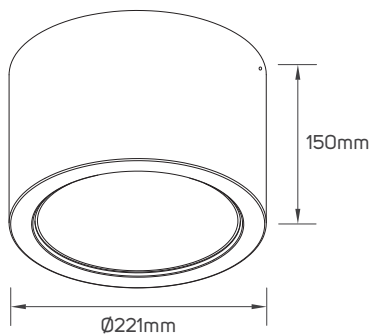


613130 - 613131 - Surface Mounted Kit


ACCESSORIES DIMENSIONS




614219 - 614220 - 614319 - Lens




614221 - 614222 - 614320 - Lens

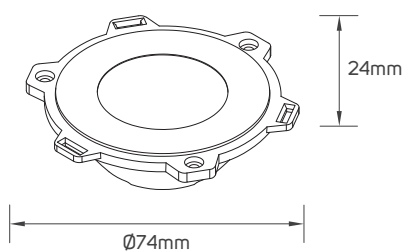


614223 - Lens

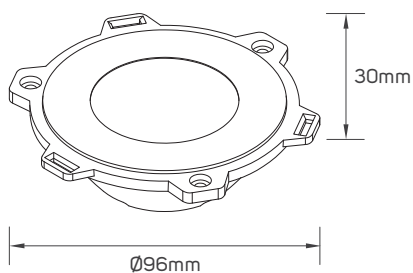


614224 - Lens

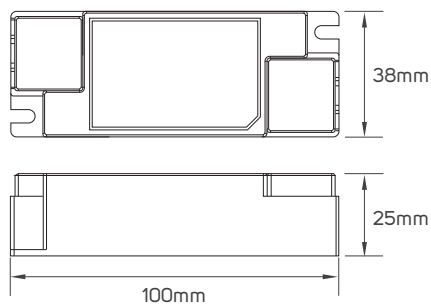


613107 - Driver

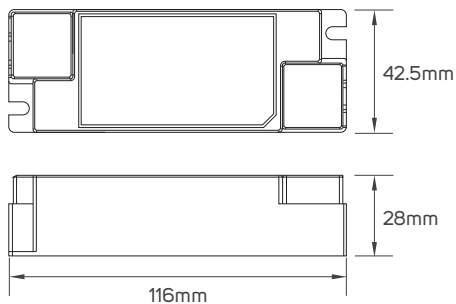

613108 - 613109 - Driver

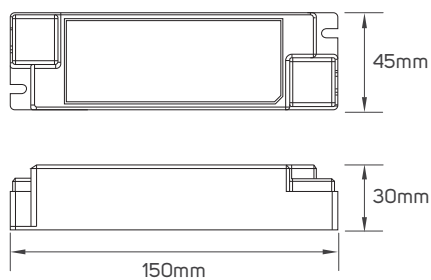


613110 - 613111 - Driver

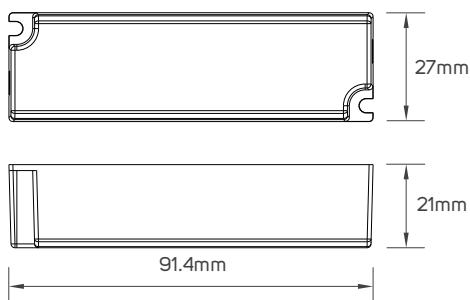

615978 - 615983 - Driver

| ACCESSORIES DIMENSIONS

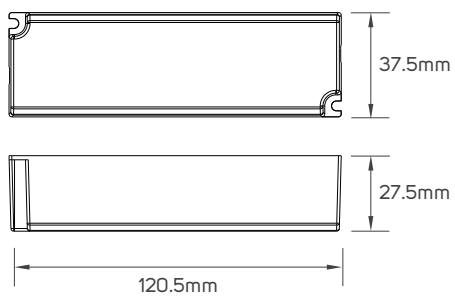

615980 - 615981 - 615984 - Driver

APPLICATION PICTURE



LED RECESSED CEILING LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



build-station



lighting stores



illus lighting

C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.