



LED PRO

# Make your boundaries **Stand Out**

## LED RECESSED WALL LUMINAIRE SERIES

### PRODUCT INFORMATION

- Surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications.
- Ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments.
- ILLUS LED RECESSED WALL Luminaire gives the customer the flexibility to choose between 6 models based on their specific need with lumen package from 60lm to 150lm.

### BENEFITS

- Unique optical distribution to highlight the inner frames or outer edges of windows, balconies or doors.
- Compact size.
- Light weight.
- Equipped with surge protective function.

### FEATURES

- High CRI>80.
- Operating voltage AC100-240V.
- Non-Dimmable.
- Good Impact Rating.

illus
illumination

**BEYOND LIGHT..**
**TO THE LAST DETAILS!**

## AREAS OF APPLICATION

Industrial

Shopping Center

Garden

Commercial

Educational Center






## TECHNICAL OPERATING & ELECTRICAL DATA

| | |
|---|---|
| Voltage & Frequency | AC100-240V, 50/60Hz |
| CRI | 80 |
| Color Temperature | 3000K |
| Dimming | Non-Dimmable |
| IEC Classification | Class I |
| Ambient Temperature | -20°C~45°C |
| IK Rating | IK08 |
| Lifespan | 30000H |
| Switching Cycle | 100000x on/off |
| Warranty Period | 36 Months |


## SPECIFICATIONS

| Code No. | Model No. | Body color | Body Material | Power | Lumen | Efficacy | Beam Angle | IP Rating | Surge Protection |
|---|---|---|---|---|---|---|---|---|---|
| 521227 | ILS5WLWW01 | Dark Grey | Aluminum+PC | 5W | 80lm | 16lm/W | 110° | IP65 | 1kV |
| 521228 | ILS5WLWW02 | Dark Grey | Aluminum+PC | 5W | 105lm | 21lm/W | 110° | IP65 | 1kV |
| 521238 | ILS2WLWW01 | Black | Aluminum+Glass | 2W | 60lm | 30lm/W | 37° | IP65 | 1.5kV |
| 521248 | ILS5WLWW03 | Dark Grey | Aluminum+PC | 5W | 150lm | 30lm/W | 48° | IP65 | 4.5kV |
| 521249 | ILS5WLWW04 | Dark Grey | Aluminum+PC | 5W | 150lm | 30lm/W | 51° | IP65 | 4.5kV |
| 521252 | ILS2WLWW02 | matt white | Aluminum+Glass | 2W | 60lm | 30lm/W | 37° | IP65 | 4.5kV |


## DIMENSIONS

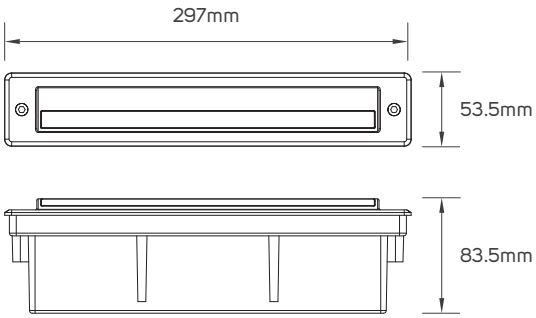



521227

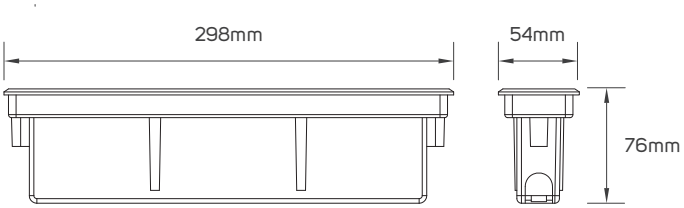



521228

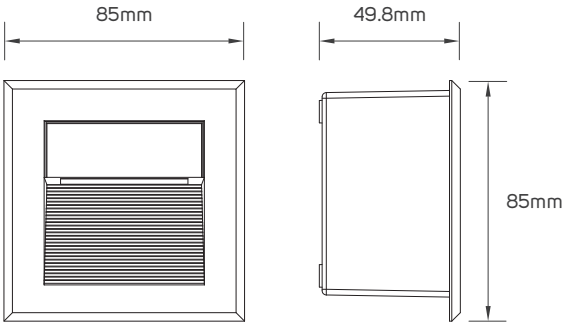


521238 - 521252

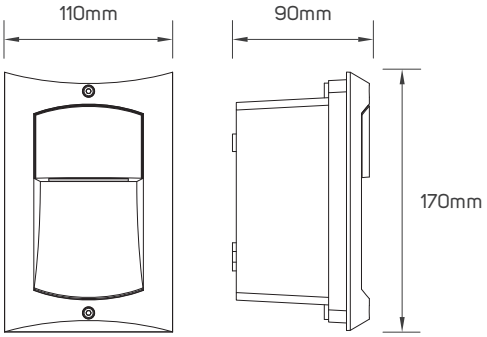


521248

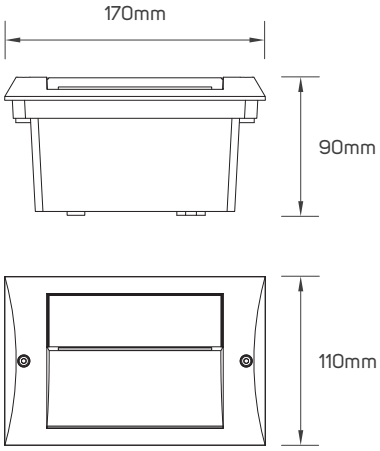


521249

## APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

# LED RECESSED WALL LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**

illus
illumination

Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456 www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

1119202IV1