



LED IN-GROUND LUMINAIRE (WALL WASHER)

PRODUCT INFORMATION

- The Illus LED inground round wall washer provides a recessed, floor-installed solution with precise optics for a wide, even vertical wall wash, ideal for architectural highlighting.
- It eliminates harsh beam edges and shadows, concealing surface imperfections while delivering dramatic, high-end, energy-efficient architectural illumination.
- The LED inground wall washer ensures dependable illumination performance with up to 500lm output for effective architectural lighting.

BENEFITS

- Seamlessly recessed into the ground, these fixtures stay invisible by day, preserving the clean, refined look of landscapes and architectural spaces.
- Wall washers use specialized optics to evenly distribute light, softening edges, reducing shadows, and creating a smooth, uniform glow across vertical surfaces.
- By illuminating walkways, garden borders, and perimeter walls, these fixtures enhance visibility, improving navigation and reducing tripping hazards.
- Built for harsh outdoor environments and foot or vehicle traffic, these luminaires feature die-cast aluminum or stainless-steel housings, tempered glass covers, and high IP67 waterproof protection.
- Like most LED landscape lights, they consume up to 75–90% less energy than halogen or incandescent bulbs and last up to 30,000 hours, significantly reducing maintenance and replacement costs.

FEATURES

- Flicker Free.
- High CRI≥85.
- Energy Saving.
- IK Rating IK08.
- Non-Dimmable.
- Efficacy up to 33lm/W.
- Long Lifespan 30000H.
- Voltage Range AC220-240V.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center




TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Black
Body Material	Aluminum
CCT	3000K
CRI	≥85
Voltage and Frequency	AC220-240V, 50/60Hz
Beam Angle	30°
Ambient Temperature	-20°C~45°C
IP Rating	IP67
IK Rating	IK08
IEC Classification	Class I
Dimming	Non-Dimmable
Surge Protection	2kV
Lifespan	30,000H
Switching Cycle	100,000x on/off
Warranty Period	36 Months

SPECIFICATION


Code No.	Model No.	Power	Lumen	Efficacy	D.F	P.F	Current
LI615967	ILS10RMOIGL04	15W	500lm	33.33lm/W	0.93	0.46	100mA

DIMENSION

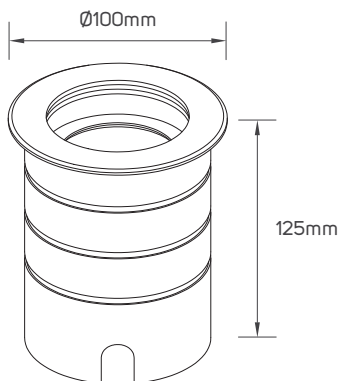

LI615967

APPLICATION PICTURE

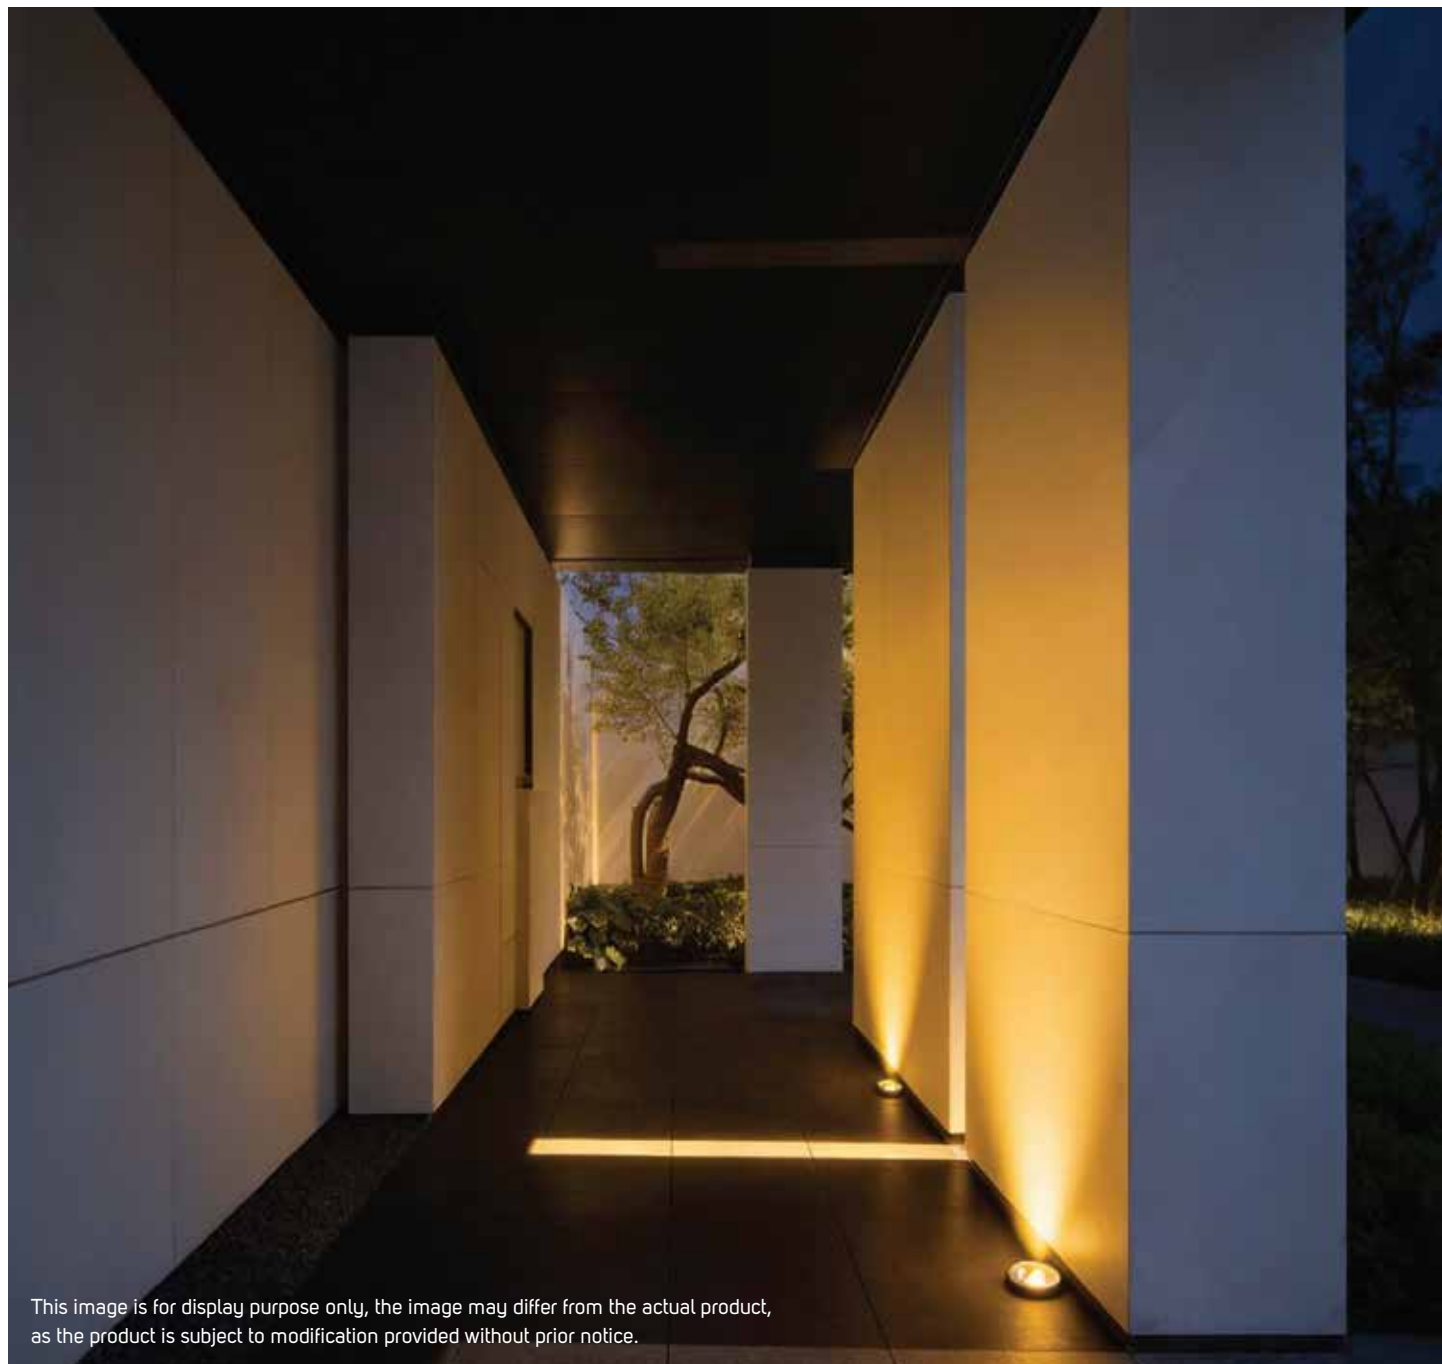

This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED IN-GROUND LUMINAIRE (WALL WASHER)

BEYOND LIGHT..
TO THE LAST DETAILS!



build-station



lighting stores



illus lighting

C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.