


USER MANUAL

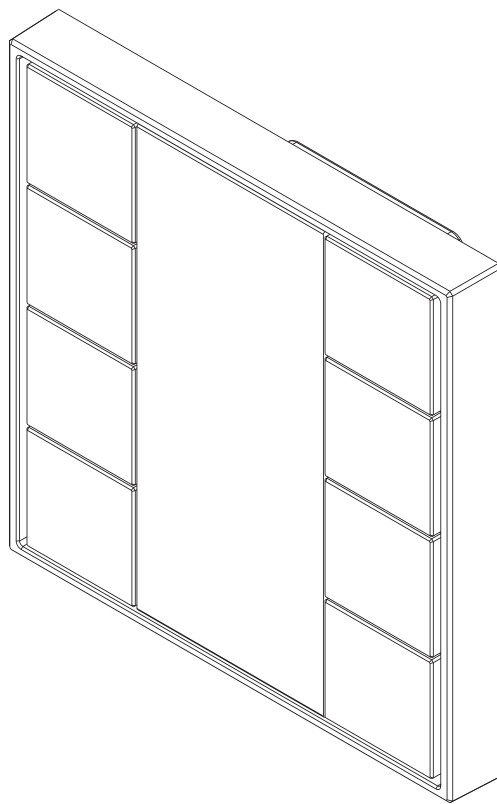

Matter Push Button

Please read this user guide carefully before installation and keep for future reference

Product Features:


The battery-powered push button keypad, based on Thread technology, enables users to conveniently activate scenes and automations while controlling other smart devices.

Featuring 8 programmable push buttons, it allows lights to be switched on with a single press and adjusted to the desired brightness level. The keypad can also be used to control smart window coverings, recall saved scenes, trigger automation routines, and perform a wide range of other smart home functions.

Product Data

Protocol	Matter
Power Supply	3VDC (CR2032)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimming Range	0.1%-100%
Dimensions	86.0x86.0x15.2mm
Protection Type	IP20

Product Dimension

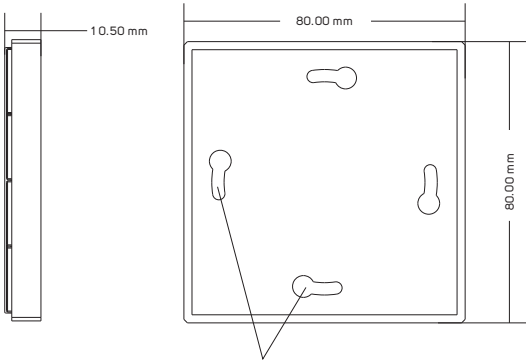

The switch can be fixed on the wall with 3M glue or screw.

Operation

This Matter thread device is a wireless receiver that communicates with a variety of Matter compatible systems. This receiver receives and is controlled by wireless radio signals from the compatible Matter system.

1. Add to a Matter platform and control through the platform:

Note: An Apple HomePod mini is used as a Matter border router for adding and controlling the device. For other Matter border routers, please refer to their user manuals to learn how to add and control Matter devices.

Step 1 : Prepare an iPhone (iOS 16.2 or later) or iPad (iPadOS 16.2 or later) with the latest version firmware, and prepare an Apple HomePod mini with the latest version firmware.

Step 2 : Connect the iPhone or iPad to your home WLAN network. Run the Apple Home app and set up the HomePod mini as instructed by Apple (as shown in Figure 1 to Figure 7).

Step 3 : Power on the device.

Step 4 : Add the device to the Apple Home app by scanning the QR code on the product as shown in Figure 8 to Figure 15.

Note: Before scanning the QR code as shown in Figure 10, short press the reset button 3 times to reset the device so that it can be discovered by the Apple Home app. Otherwise if it has already been added to another gateway, current gateway can not discover and add it.

Note: When choose the room that you would like to add the keypad to, please make sure to choose the same room that the HomePod mini is located as shown in Figure 13.

Step 5: Once the keypad is added to the gateway successfully, you can tap on the device to configure its key functions as shown in Figure 16 to Figure 17.

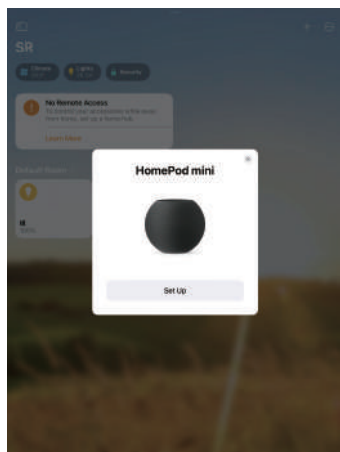


Figure 1

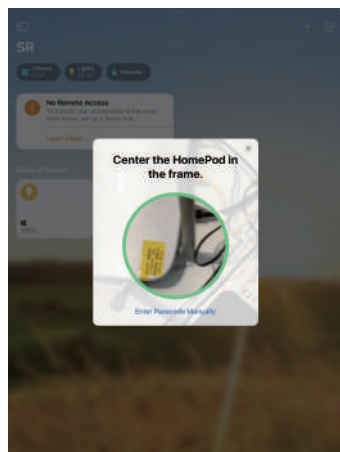


Figure 2

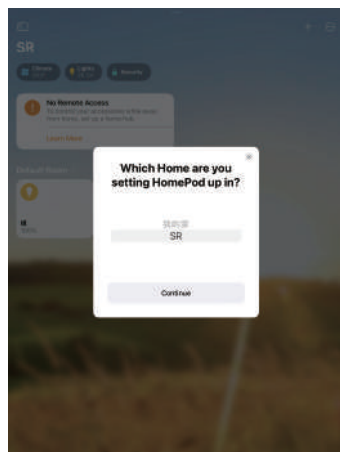


Figure 3

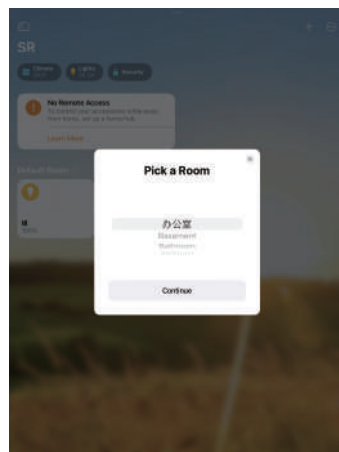


Figure 4

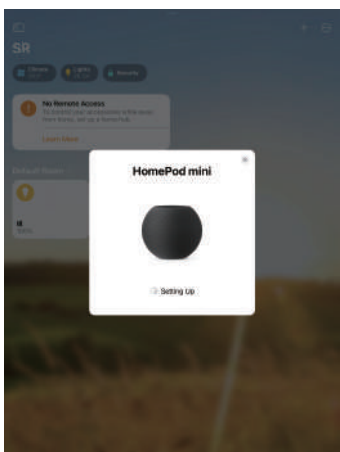


Figure 5

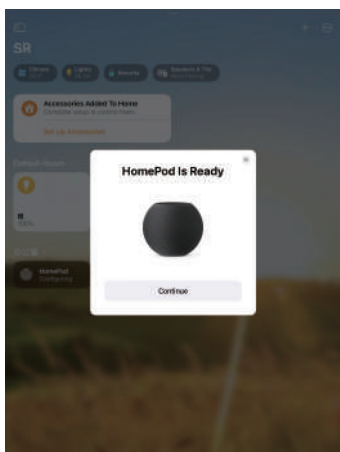


Figure 6

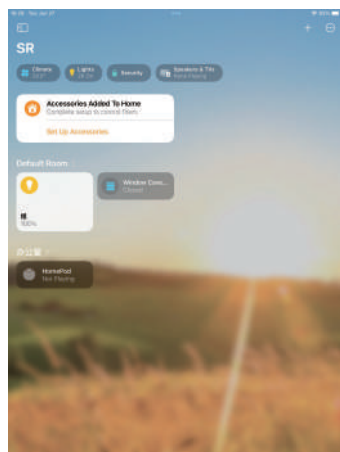


Figure 7

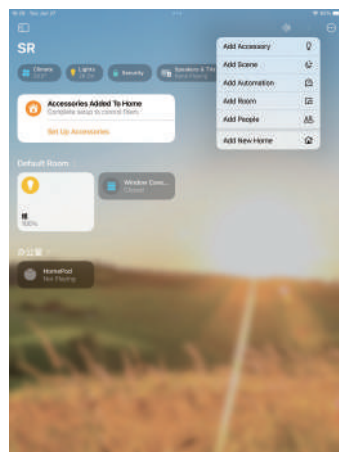


Figure 8

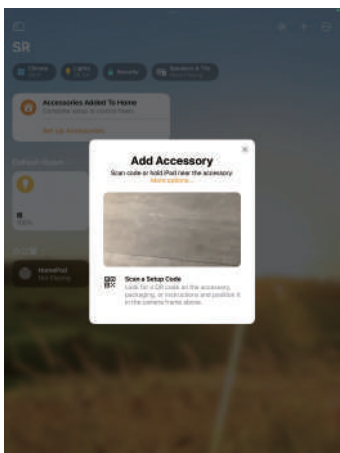


Figure 9

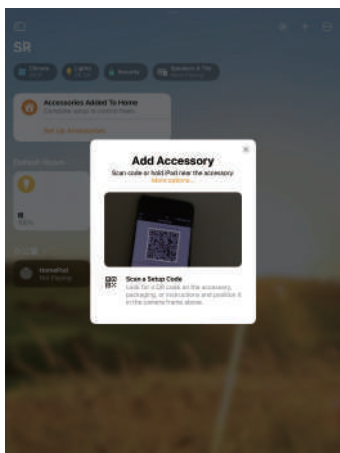


Figure 10

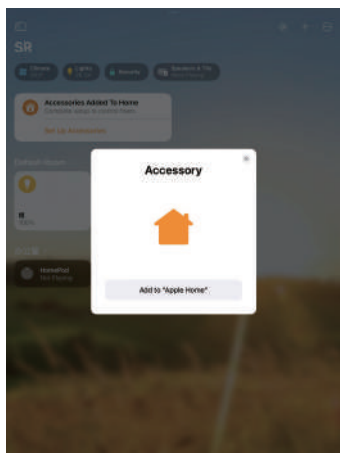


Figure 11

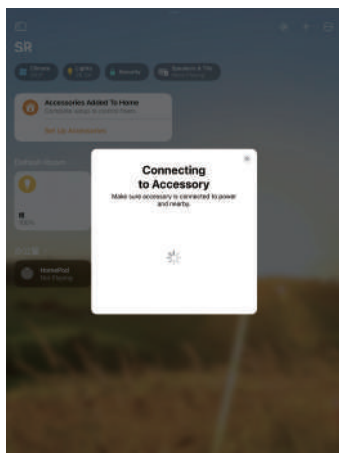


Figure 12

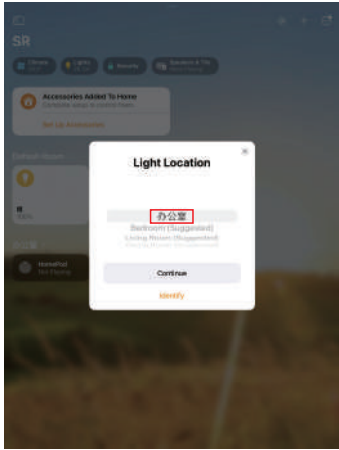


Figure 13

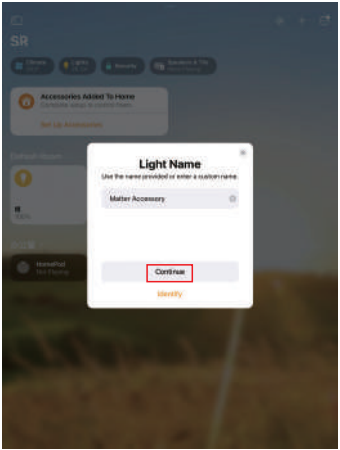


Figure 14

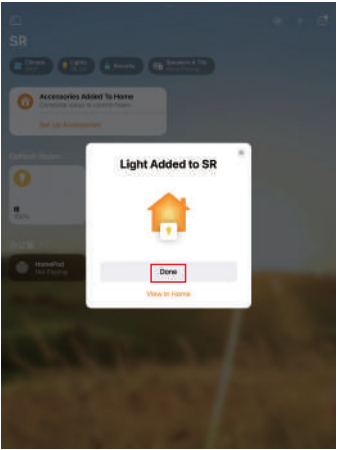


Figure 15

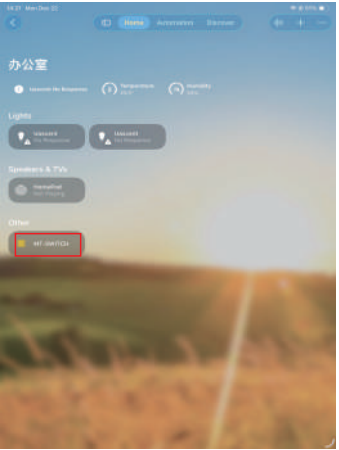


Figure 16


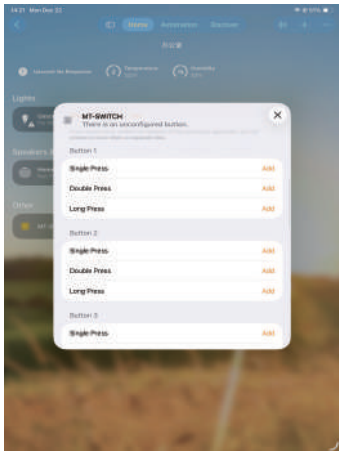


Figure 17

2.Factory reset the device


Short press the reset button 3 times, the LED indicator will flash to indicate a successful reset.




Installation

1. Remove battery insulator


1) Open the cover




2) Take out the battery



3) Remove the battery insulator




4) Fit back the battery and cover




2. Install the controller to wall(2 methods)

A. Screw Installation

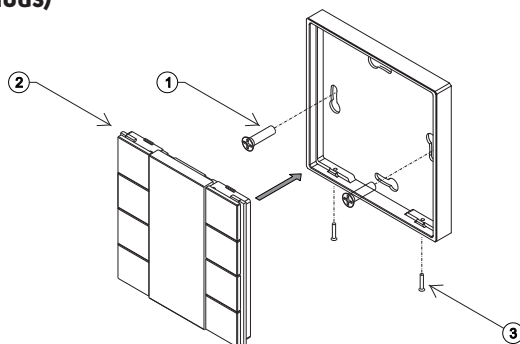

B. 3M Tape Installation

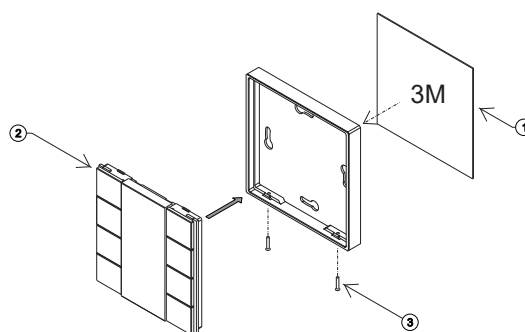

Battery Warnings & Safty - Warnings and Statements:

This product contains a CR Coin Cell Lithium Battery and meets the requirements of the 16 CFR Part 1263. For your safety and to ensure proper operation, please carefully read and understand the following warnings and statements.



INGESTION HAZARD: Contains a button/coin battery. Swallowing can cause death or serious injury. Internal chemical burns can occur in as little as 2 hours.

Keep new and used batteries OUT OF REACH OF CHILDREN. If swallowed or inserted into the body, seek immediate medical attention.

Statements:


- Indoor use only.
- Remove and recycle used batteries per local rules. Keep away from children. Do not trash or burn.
- Used batteries can still cause severe injury or death.
- Contact poison control for treatment info.
- Use only CR2032 or equivalent, 3VDC.
- Do not recharge non-rechargeable batteries.
- Do not force discharge, recharge, disassemble, overheat, or burn. May leak or explode.
- Insert batteries with correct polarity (+ and -).
- Do not mix old/new, different brands, or battery types.
- Remove batteries if product unused for long time.
- Keep battery compartment closed. If not closing securely, stop use, remove batteries, and keep away from children.
- If leaking, do not touch or smell. Wipe compartment and replace.
- If leaked material contacts skin/clothes, rinse with water. If in eyes, rinse thoroughly and get medical help.

Battery information:


Battery	CR2032
Battery Type	Button Cell
Operation Voltage	3VDC
Diameter	20mm(0.787inch)

٢. تثبيت وحدة التحكم على الحائط (طريقتان)

أ. التثبيت بالبراغي (Screw Installation)

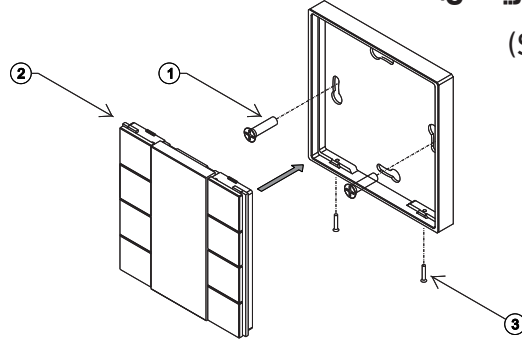

ب. التثبيت بشريط لاصق (3M Tape Installation)

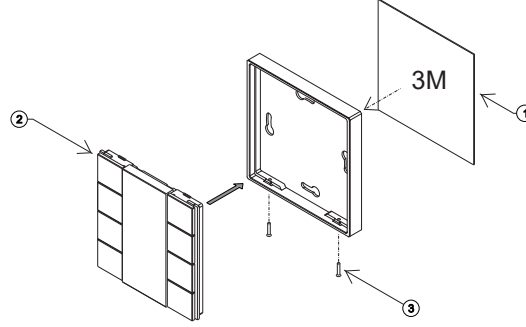

تحذيرات البطارية والسلامة - التحذيرات والبيانات:

يحتوي هذا المنتج على بطارية ليثيوم من نوع خلية عملة (CR Coin Cell) ويتوافق مع متطلبات 16CFR Part 1263. من أجل سلامتك وضمان التشغيل الصحيح، يُرجى قراءة وفهم التحذيرات والبيانات التالية بعناية.

خطر الابتلاع: يحتوي المنتج على بطارية زر/عملة. قد يؤدي ابتلاعها إلى الوفاة أو إصابات خطيرة. يمكن أن تحدث حروق كيميائية داخلية خلال ساعتين فقط. يُرجى إبقاء البطاريات الجديدة والمستعملة بعيدًا عن متناول الأطفال. وفي حال تم ابتلاعها أو إدخالها إلى الجسم، يجب طلب العناية الطبية الفورية.




البيانات والإرشادات:


- للاستخدام الداخلي فقط.
- قم بإزالة البطاريات المستعملة وإعادة تدويرها وفقًا للقوانين المحلية. يُحفظ بعيدًا عن متناول الأطفال. لا يتم التخلص منها في القمامة أو حرقها.
- قد تتسبب البطاريات المستعملة أيضًا في إصابات خطيرة أو الوفاة.
- يُرجى التواصل مع مركز السموم للحصول على معلومات العلاج عند الحاجة.
- استخدم فقط بطارية من نوع CR2032 أو ما يعادلها بجهد ٣ فولت (3VDC).
- يُمنع إعادة شحن البطاريات غير القابلة للشحن.
- لا تقم بتفريغ البطارية بالقوة أو إعادة شحنها أو تفكيكها أو تسخينها أو حرقها، فقد يؤدي ذلك إلى تسربها أو انفجارها.
- يجب إدخال البطاريات بالطريقة الصحيحة (+ و -).
- لا تخلط بين البطاريات القديمة والجديدة، أو من علامات تجارية مختلفة، أو أنواع مختلفة.
- قم بإزالة البطاريات إذا لم يتم استخدام المنتج لفترة طويلة.
- حافظ على إغلاق حجرة البطارية بإحكام. إذا لم تُغلق بشكل آمن، توقف عن الاستخدام، وأزل البطاريات، وأبعد عنها عن متناول الأطفال.
- في حال حدوث تسرب، لا تلمس أو تستنشق المواد المتسربة. قم بمسح حجرة البطارية واستبدالها.
- إذا لامست المواد المتسربة الجلد أو الملابس، اغسلها بالماء. وإذا وصلت إلى العينين، اشطفها جيدًا واطلب المساعدة الطبية فورًا.

معلومات البطارية:


Battery	CR2032
Battery Type	Button Cell
Operation Voltage	3VDC
Diameter	20mm(0.787inch)

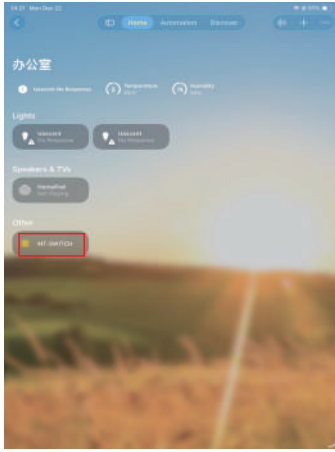


الشكل ١٦

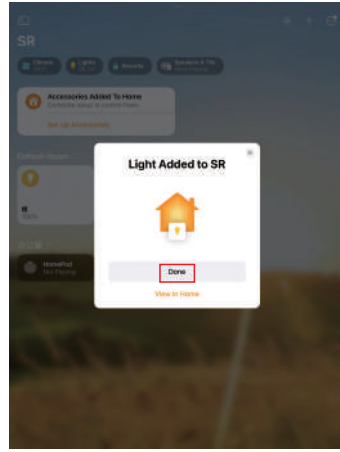


الشكل ١٥

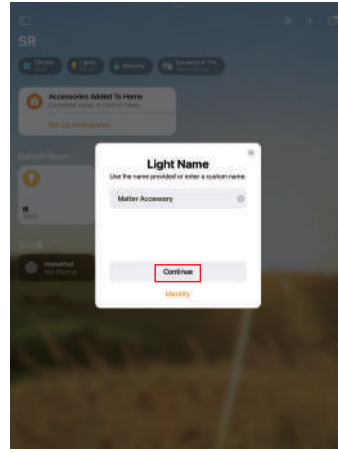

الشكل ١٤

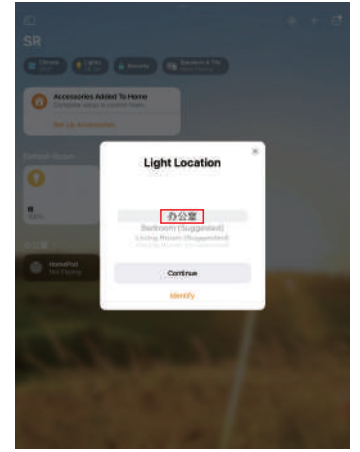


الشكل ١٣

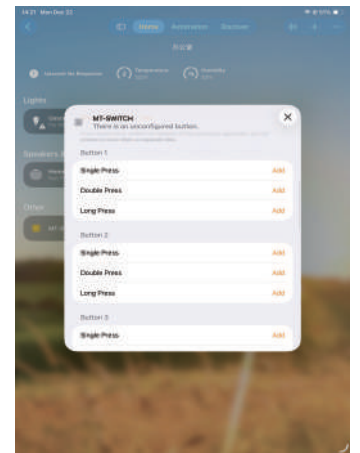

الشكل ١٧

٢. إعادة ضبط المصنع للجهاز


اضغط ضغطة قصيرة على زر إعادة الضبط (Reset) ثلاث مرات، وسيومض مؤشر LED للدلالة على نجاح عملية إعادة الضبط.




التركيب

١. إزالة عازل البطارية


١. افتح الغطاء




٢. أخرج البطارية



٣. قم بإزالة العازل البلاستيكي للبطارية




٤. أعد تركيب البطارية ثم أعد إغلاق الغطاء




ملاحظة: قبل مسح رمز QR كما هو موضح في الشكل ١٠، اضغط ضغطة قصيرة على زر إعادة الضبط (Reset) ٣ مرات متتالية لإعادة تعيين الجهاز حتى يصبح قابلاً للاكتشاف بواسطة تطبيق Apple Home. وإلا، إذا كان الجهاز قد تمت إضافته مسبقاً إلى بوابة (Gateway) أخرى، فلن تتمكن البوابة الحالية من اكتشافه أو إضافته.

ملاحظة: عند اختيار الغرفة التي ترغب في إضافة لوحة المفاتيح إليها، يُرجى التأكد من اختيار نفس الغرفة التي يوجد بها جهاز HomePod mini، كما هو موضح في الشكل ١٣.


الخطوة ٥: بمجرد إضافة لوحة المفاتيح إلى البوابة (Gateway) بنجاح، يمكنك النقر على الجهاز داخل التطبيق لتهيئة وظائف الأزرار وتخصيصها، كما هو موضح في الأشكال من ١٦ إلى ١٧.

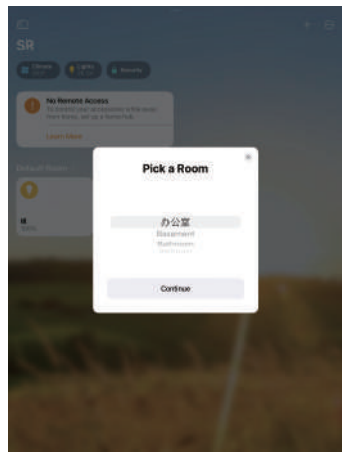


الشكل ٤

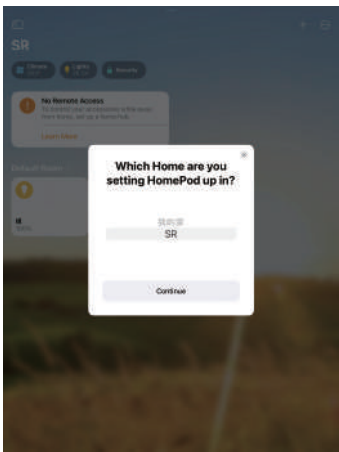


الشكل ٣

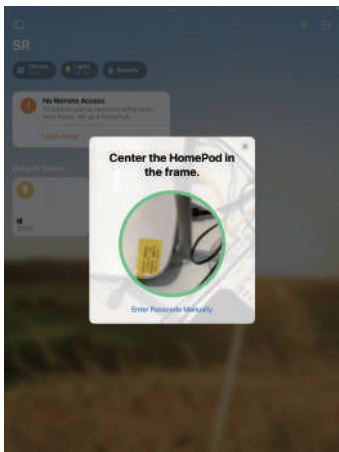


الشكل ٢

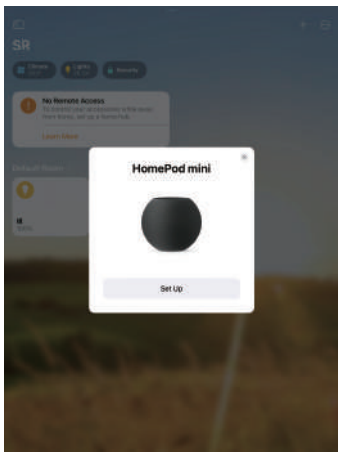


الشكل ١

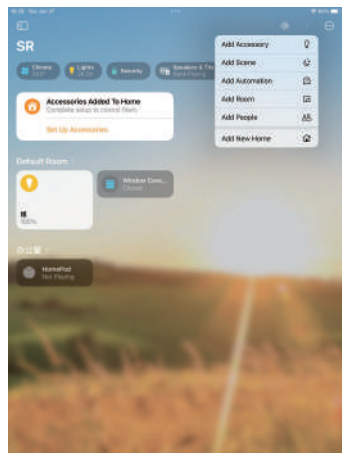


الشكل ٨

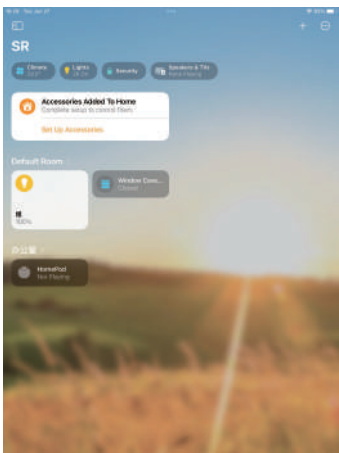


الشكل ٧

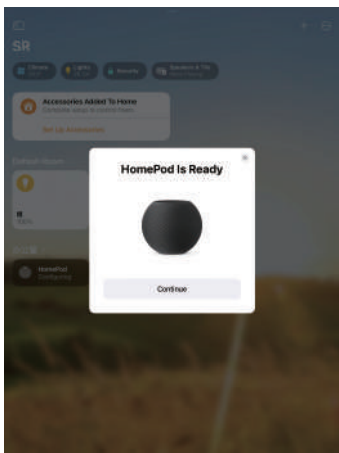


الشكل ٦

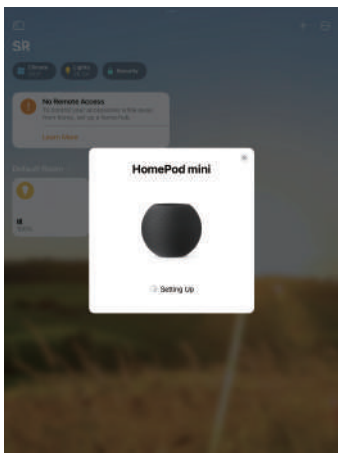


الشكل ٥

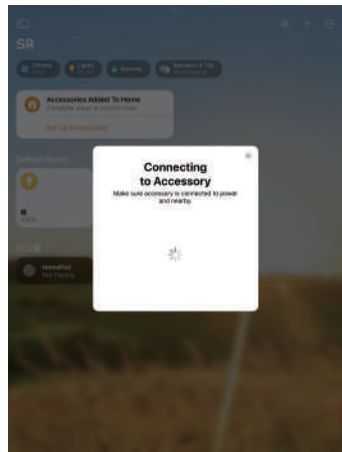


الشكل ١٢

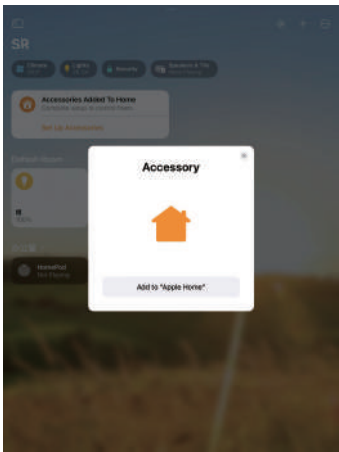

الشكل ١١

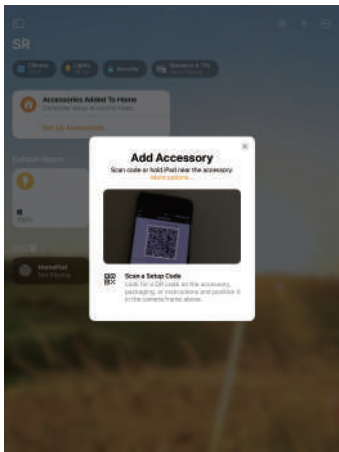

الشكل ١٠

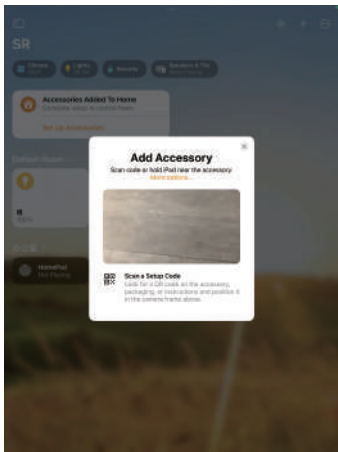

الشكل ٩


مميزات المنتج:

لوحة مفاتيح تعمل بالبطارية وتعتمد على تقنية Thread، تتيح للمستخدم تفعيل المشاهد (Scenes) وسيناريوهات الأتمتة (Automations) والتحكم في الأجهزة الذكية الأخرى بكل سهولة. تحتوي اللوحة على ٨ أزرار قابلة للبرمجة، مما يتيح تشغيل الإضاءة بضغط واحدة وضبط مستوى السطوع حسب الرغبة. كما يمكن استخدامها للتحكم في الستائر الذكية وأنظمة تغطية النوافذ، واستدعاء المشاهد المحفوظة، وتشغيل إجراءات الأتمتة المختلفة، بالإضافة إلى العديد من وظائف المنزل الذكي الأخرى.

مواصفات المنتج

Protocol	Matter
Power Supply	3VDC (CR2032)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimming Range	0.1%-100%
Dimensions	86.0x86.0x15.2mm
Protection Type	IP20

أبعاد المنتج

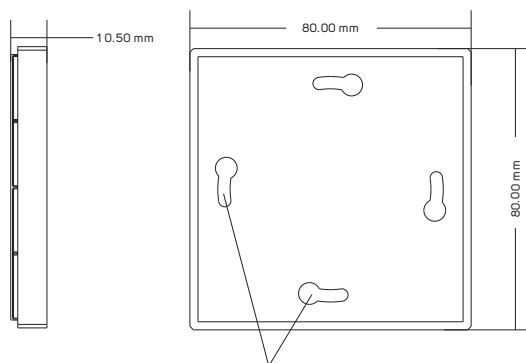

يمكن تثبيت المفتاح على الحائط باستخدام لاصق 3M أو بواسطة البراغي (المسامير).

التشغيل

يُعد جهاز Matter Thread هذا جهاز استقبال لاسلكيًا يتواصل مع مجموعة متنوعة من الأنظمة المتوافقة مع Matter. يستقبل الجهاز إشارات الراديو اللاسلكية من أنظمة Matter المتوافقة ويتم التحكم فيه من خلالها.

١. الإضافة إلى منصة Matter والتحكم من خلال المنصة

ملاحظة: تم استخدام جهاز Apple HomePod mini كموجه حدودي (Matter Border Router) لإضافة الجهاز والتحكم فيه. بالنسبة للأجهزة التوجيه الحدودية الأخرى المتوافقة مع Matter، يُرجى الرجوع إلى دليل المستخدم الخاص بها لمعرفة كيفية إضافة أجهزة Matter والتحكم بها.


الخطوة ١: قم بتجهيز جهاز iPhone يعمل بنظام iOS 16.2 أو أحدث، أو جهاز iPad يعمل بنظام iPadOS 16.2 أو أحدث، مع التأكد من تحديثهما إلى أحدث إصدار من البرنامج الثابت (Firmware). كما يجب تجهيز جهاز Apple HomePod mini محدثًا إلى أحدث إصدار.

الخطوة ٢: قم بتوصيل جهاز iPhone أو iPad بشبكة WLAN المنزلية. افتح تطبيق Apple Home وقم بإعداد جهاز HomePod mini وفقًا للتعليمات المقدمة من شركة Apple (كما هو موضح في الأشكال من ١ إلى ٧).

الخطوة ٣: قم بتشغيل الجهاز.

الخطوة ٤: أضف الجهاز إلى تطبيق Apple Home عن طريق مسح رمز QR الموجود على المنتج، كما هو موضح في الأشكال من ٨ إلى ١٥.

دليل المستخدم

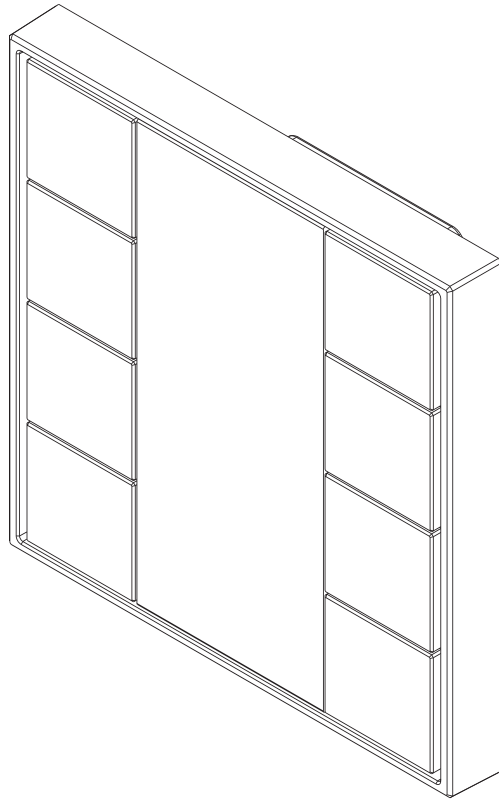

مفتاح تحكم Matter

يرجى قراءة دليل المستخدم بعناية قبل التثبيت، والاحتفاظ به للرجوع إليه في المستقبل