



LED
PRO

LED PROJECTOR LUMINAIRE

PRODUCT INFORMATION

- Illus LED outdoor projectors combine advanced optical performance, energy efficiency, and robust durability with precise beam control, delivering impactful architectural lighting, reduced maintenance, and long-term operational efficiency.
- Designed for precise accent lighting and refined landscape illumination, delivering enhanced visual impact and architectural definition.
- Available in 3 models, the LED projector luminaire offers flexible lumen packages ranging from 230lm to 950lm to suit diverse lighting applications.

BENEFITS

- LED projectors reduce energy consumption by up to 75–90% compared to traditional HID or incandescent sources, while delivering equivalent or superior surface illumination
- LED projectors deliver instant full brightness with no warm-up or restrike delay, while frequent switching has minimal impact on LED lifespan.
- Featuring robust housing and die-cast aluminum heat sinks for efficient, fanless cooling, LED projectors ensure reliable performance in demanding outdoor environments.
- Free from toxic mercury and lead, LED projectors reduce environmental impact and carbon emissions through lower energy consumption.
- High-precision, long-range projection enhances nighttime visibility across façades, landscapes, walkways, and parking perimeters, while supporting effective perimeter security.

FEATURES

- High CRI $\geq$ 85.
- Non-Dimmable.
- Good Impact Rating.
- Efficacy up to 63lm/W.
- Long Lifespan 50000H.
- Operating Voltage AC220-240V.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Commercial



Shopping Center



Educational center



Garden




TECHNICAL OPERATING & ELECTRICAL DATA

Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	85
IEC Classification	Class I
IP Rating	IP65
Dimming	Non-Dimmable
Ambient Temperature	-20°C~45°C
Material	Aluminum+Glass
IK Rating	IK06
Surge Protection	1kV
Lifespan	50000H
Switching Cycle	100000x on/off
Warranty Period	60 Months


SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	CCT	Beam Angle	Current
LI615353	ILS5WSPILWW01	Dark Grey	5.5W	230lm	41.82lm/W	3000K	24°	50mA
LI615354	ILS10WSPILWW01	Dark Grey	10W	550lm	55lm/W	3000K	24°	90mA
LI615355	ILS15WSPILWW01	Dark Grey	15W	950lm	63.33lm/W	3000K	24°	150mA


DIMENSIONS

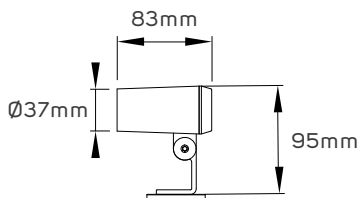

LI615353

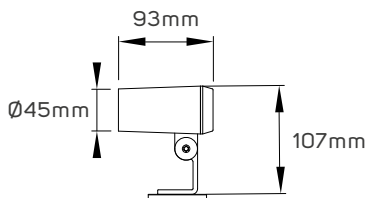

LI615354

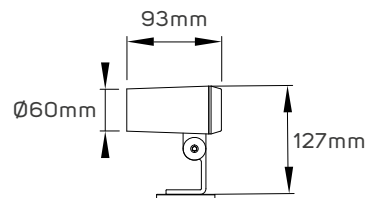

LI615355



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED PROJECTOR LUMINAIRE

**BEYOND LIGHT..
TO THE LAST DETAILS!**



build-station



lighting stores



illus lighting

C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.