

LIGHT DIMMER SWITCH



AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

Current	Leading edge dimming 150W trailing edge dimming 300W, 240V~
Embedding Depth	22mm
Module Material	PC/PCB electrical parts
Frame Material	Cold- roll steel sheets

SPECIFICATIONS

Code No.	Model No.	Body Material	Body Color
LI533100	K3LDIMMPPW3	Metal	White
LI533101	K3LDIMMPPG3	Metal	Gold
LI533102	K3LDIMMPPGR3	Metal	Grey
LI533103	K3LDIMMPPB3	Metal	Black
LI533104	K8LDIMMPPGR3	Metal	Grey
LI533105	K8LDIMMPPG3	Metal	Gold
LI533106	K8LDIMMPPB3	Metal	Black

DIMENSIONS

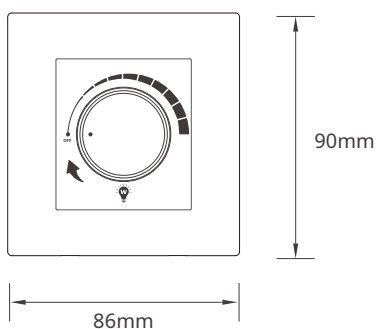

LI533100 - LI533101 - LI533102 - LI533103 - LI533104 - LI533105 - LI533106

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.



LIGHT DIMMER SWITCH

**BEYOND LIGHT..
TO THE LAST DETAILS!**



build-station



lighting stores



illus lighting

C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

11192021V.1